



HT67 RTJ

Outstanding performance

- 73 ft 5 in working height
- 60 ft 5 in maximum outreach

Exceptional productivity

- Best lifting speed 56 sec
- Fully proportional and simultaneous movements

Reliable safety and comfort

- Most rigid boom
- Single control for both steering axles

Optimized maintenance time

- Easy access to all components
- Easy boom maintenance
- New fully modular platform



Haulotte 
GROUP

More than lifting






HT67 RTJ

ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

HT67 RTJ 2WS

Working height	73 ft 5 in
Platform height	67 ft 5 in
Horizontal outreach	60 ft 5 in
Lift capacity	500 lbs (2 persons)
F x G Platform size	8 ft x 3 ft
A Length	34 ft 3 in
H Length - storage	25 ft 8 in
B Overall width	8 ft 1 in
C Height - stowed	8 ft 11 in
I Height - storage	10 ft 10 in
Vertical jib rotation	133° (+68/-65)
Platform rotation	180° (+90/-90)
Boom rotation angle	90° (+75/-15)
Turntable rotation	360° continuous
Tailswing	3 ft 7 in
D Wheelbase	8 ft 2 in
E Ground clearance	14 in
Drive speed	0.3 - 4.0 mph
Gradeability	40 %
Turning radius - outside	20 ft 8 in
Tires	385/65 - 22.5
Engine	Kubota 36.5 kW - 48.9 hp
Weight	25,776 lbs

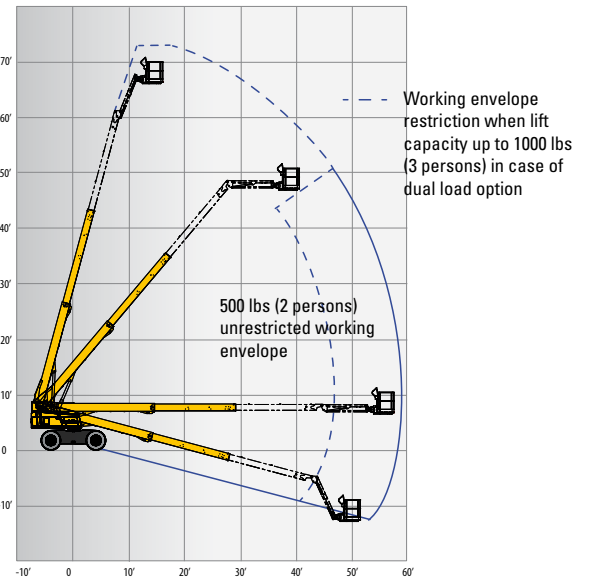

STANDARD EQUIPMENT

- 4 wheel drive 2 wheel steer
- Automatic differential wheel lock
- Front oscillating axle
- Proportional controls
- 4 simultaneous movements
- 500 lbs load capacity unrestricted working envelope
- Fully Modular large basket
- Lateral swing door entry gate
- Upper control box cover
- Tool tray
- AC Power to the Platform
- Diagnostic display for fault and service alerts
- Swing out engine tray
- Hour meter
- Low fuel level indicator (upper and lower control boxes)
- Engine pre-heat system
- Tilt alarm
- Maximum wind speed 28 mph
- 12 V battery / electrical control system
- Electric pump system and emergency descent
- Boom maintenance (extension system, upper pads replacement) without disassembly
- Gull wing style cowlings
- Alarm package

OPTIONS AND ACCESSORIES

- 4 wheel steer
- Dual load capacity 500 lbs / 1000 lbs (2 / 3 persons)
- 3.5 kW or 12kW generator
- Narrow platform: 6 ft x 3 ft
- Drop bar entry gate
- 55W platform worklight
- Air line to platform
- Flashing beacon
- Glazier Pack
- Cold Weather Package
- Warm environment kit
- 37 mph wind speed

